

**WHAT'S INCLUDED**

- 1 SOL-ARK CONDUIT BOX
- 1 DRILLING TEMPLATE

# HELIOS ESS

## Sol-Ark 15K Conduit Box

### Simplify Installation. Protect Connections.

The HELIOS ESS Sol-Ark Conduit Box enables a clean, code-compliant connection between HELIOS batteries and the Sol-Ark 15K inverter, streamlining installation.

### FAST INSTALLATION

Sol-Ark 15K specific knock outs and quick-connect terminals enable rapid deployment.

### INTEGRATED VENTING CHANNEL

Built-in rear spacing and top vent slots maintain unobstructed airflow to the Sol-Ark 15K's ventilation openings.

### INSTALLER-FRIENDLY

Lightweight, galvanized steel enclosure mounts securely atop the HELIOS ESS battery.

### INTEGRATED LYNK II MOUNTING POINT


Includes internal mounting support for optional LYNK II Communication Gateway (sold separately).

### RELIABLE AND SAFE

Lockable enclosure to protect cables, conceal connections, and minimize electrical hazard risk.

#### SPECIFICATIONS

|          |                                      |
|----------|--------------------------------------|
| Height   | 229.5 mm / 9.04 in                   |
| Width    | 585 mm / 23 in                       |
| Depth    | 285.5 mm / 11.24 in                  |
| Weight   | 6 kg / 13.2 lb                       |
| Material | Powder Coated Galvanized Steel Sheet |

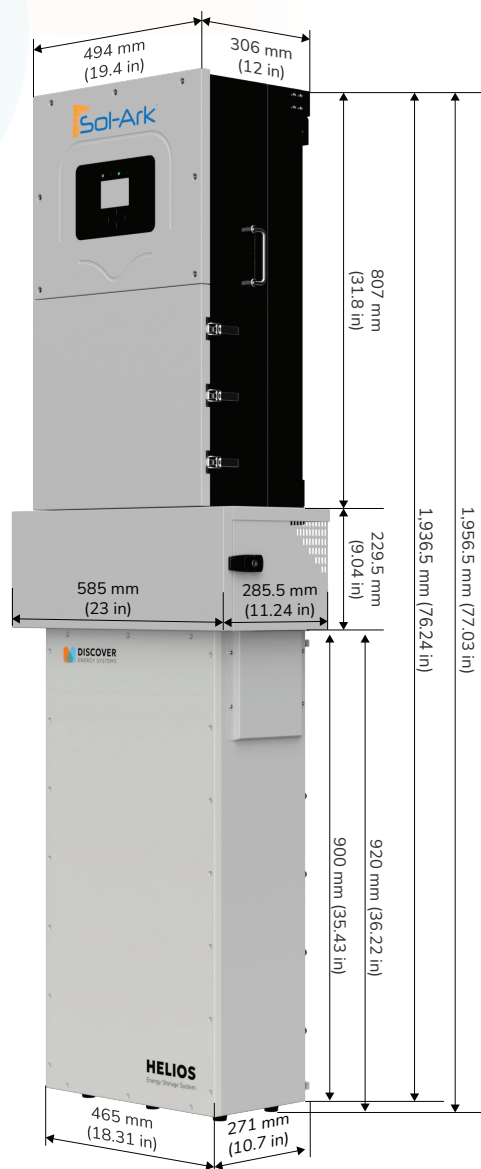

# HELIOS ESS

## Generic Conduit Box

### Simplify Installation. Protect Connections.

The HELIOS ESS Conduit Box enables a clean, code-compliant connection between HELIOS batteries and market-leading inverters, streamlining installation.

#### FAST INSTALLATION

Universal knockouts and quick-connect terminals enable rapid deployment.

#### INSTALLER-FRIENDLY

Lightweight, galvanized steel enclosure mounts securely atop the HELIOS ESS battery.

#### INTEGRATED LYNK II MOUNTING POINT

Includes internal mounting support for optional LYNK II Communication Gateway (sold separately).

#### RELIABLE AND SAFE

Lockable enclosure to protect cables, conceal connections, and minimize electrical hazard risk.

#### SPECIFICATIONS

|          |                                      |
|----------|--------------------------------------|
| Height   | 229.5 mm / 9.04 in                   |
| Width    | 585 mm / 23 in                       |
| Depth    | 285.5 mm / 11.24 in                  |
| Weight   | 6 kg / 13.2 lb                       |
| Material | Powder Coated Galvanized Steel Sheet |

